

SAUTER Declaration on materials and the environment

Product

1/6



Type
Designation
Product range
Product group of eco-balance

AVM215SF132R
SUT 500N valve actuator
Electric actuators
Positioning actuators

Manufacturer	Fr. Sauter AG		
	Im Surinam 55, CH-4016 Basel		
Management system certified according to		Since	with
	ISO 9001	10 Aug. 1993	SQS
	ISO 9001:2000	10 Aug. 2002	SQS
	ISO 14001:2004	10 Aug. 2005	SQS
	OHSAS 18001:1999	10 Aug. 2005	SQS
Environmentally-compatible product design	Basis	Management system Fr. Sauter AG	
	Process	Business process Product innovationEcological accounting	

01.01

Product description	CE conformity	CE conformity			
	Function, operation, maintenance, service	PDS 51.383			
Environmental risk	Fire protection according to	EN 60695-2-11, EN 60695-10-2			
	Fire load ¹ Hazardous substances ² Banned substances (see link below)	7.7 MJ Conforming to RoHS 2011/65/EU Conforming to REACH 1907/2006/EC			
	Parts containing halogen (causing corrosive smoke)	Printed circuit boards			
	Liquids polluting the aquatic environment	Lubricant			
	Explosive substances	None			
Packaging ³	Cardboard PAP21	40.5 g			

Materials

	Total weight of product 4	926 g	Material Safety Data Sheet (MSDS)	EU waste code ⁵
Plastic				
PA66		14.2 g	Yes	20 01 39
PBT		31.2 g	Yes	20 01 39
PC		179.6 g	Yes	20 01 39
POM		16.5 g	Yes	20 01 39
EPDM		1.2 g	Yes	20 01 39
Metal				
Steel of different alloy	'S	147.7 g	Not required	20 01 40
Aluminium of all alloys	S	316.5 g	Not required	20 01 40
Printed circuit board	i			
Assembled PCB, lead	d-free solder	20 g	Not required	20 01 36
Various				
None				
Special components	S			
Motor		105 g	Not required	16 02 09

¹ See **Remarks** on last page ² Only applies to electrical devices ³ Directive 94/62/EC and follow-on document, ruling 97/129/EC

⁴ See **Remarks** on last page
⁵ Directive 75/442/EEC and follow-on document, ruling 2001/118/EC


Lubricant, Shm0.2 gNot required20 01 34Cable94.2 gNot required20 01 36



Note

The following materials balance and the calculation of the environmental impact relate to type AVM215SF132R.

Materials balance

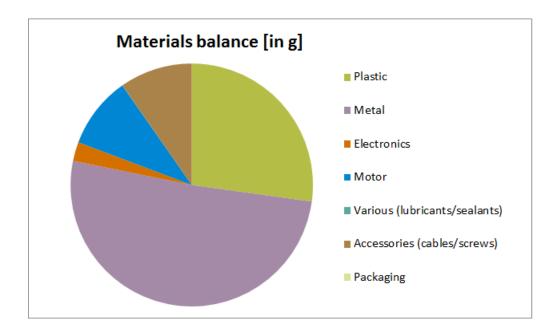

Energy requirement in the utilisation phase

Power requirement for component

Minimum power consumption 0.45 W

Average power consumption 2 W


Typical energy consumption per year 8.4 kWh

The energy requirement evaluation was performed for a typical utilisation scenario. The European electricity mix from ecoinvent 2.2 was used to evaluate the power consumption in the utilisation phase.

Calculation of the environmental impact

Evaluation over the entire life stage of 8 years in a typical utilisation scenario. The results shown are based on a method of ecological scarcity that combines various environmental effects into an "environmental impact points" key figure. The method is based on Switzerland's environmental targets and evaluates the individual effects depending on the "Distance to Target".

Indicator	Unit	Production	Utilisation	Disposal	Total
Global warming potential (GWP), IPCC 2007, 100a	kg CO2 eq.	6.9	20.8	0.3	28.0
Cumulative energy demand (non- renewable resources)	MJ eq.	132	421	0.6	554
Cumulative energy demand (renewable resources)	MJ eq.	11.9	31.9	0.02	43.9
Acidification potential, CML 2001	kg SO2 eq.	8.24E-02	8.58E-02	1.84E-04	1.68E-01
Eutrophication potential, CML 2001	kg PO4 eq.	4.38E-02	6.82E-02	1.37E-04	1.12E-01
Ozone creation potential, CML 2001	kg C2H4 eq.	4.01E-03	3.45E-03	7.18E-06	7.47E-03
Ecological scarcity 2006: Total	UBP	17'940	21'200	330	39'500

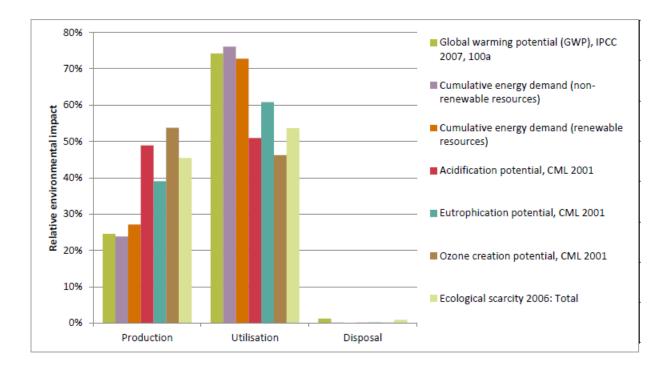

The relationship of the contributions made by the utilisation in comparison to those made by the reduction and disposal depends on the intensity of the utilisation (utilisation scenario).

A	Product: The device must be disposed of as waste from electrical and electronic equipment (electrical/electronic scrap) and must not be disposed of as household waste. This applies in particular to the assembled PCB.			
Disposal				
	It is possible that special treatment for special components is compulsory by law or makes ecological sense. Packaging: Recyclable The local and currently valid laws (WEEE2012/19/EU) must be observed.			
	Special information:			
	None			
Remarks	⁽¹⁾ Depending on the fire load for the type:			
	AVM215SF132R	7.7	MJ	
	⁽²⁾ Depending on the weight of the type:			
	AVM215SF132R	926	g	
How the environment benefits	With these products we make a significant contribution to energy savings in buildings and to reducing global warming.			
	In the Green Building area, our products ensure that customer requirements are fulfilled optimally and that there is cost efficiency over the entire building life-cycle.			
	(Alternativelya place for specific technical advantages)			
Extent of applicability	This declaration is an environmental declaration based on ISO 14025 and describes the environmental impact of the product over its entire life stage.			

The declaration is made in a compact form without an external check or

registration.

The data gathered with existing data inventories for production processes has been evaluated from the ecoinvent 2.2 European database.

For the determination of the energy requirement during the utilisation phase of the product, standard HVAC applications and average climatic conditions in Switzerland were assumed, based on the ecological accounting for the corresponding product group.

Disclaimer: This declaration is only for information purposes.

Deviations from the information it contains can occur without being reported. Fr. Sauter AG explicitly rules out any liability for any consequences that may result due to the above information.

Your local SAUTER representative will provide further information on environmental aspects, and specifically on disposal.

References

Ecoinvent 2010 ecoinvent data v2.2, Swiss Centre for Life Cycle Inventories, Dübendorf FOEN 2008 eco-balances: method of ecological scarcity - eco-factors 2006, FOEN